
# Getac

Getac recommends Windows 11 Pro for business





- 10th Generation Intel<sup>®</sup> Core™ i7 / i5 Processor
- 10.1" FHD LumiBond<sup>®</sup> display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with optional Intel vPro, Windows Hello face-authentication camera and multifactor authentication options
- Detachable keyboard & multi-funtional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios

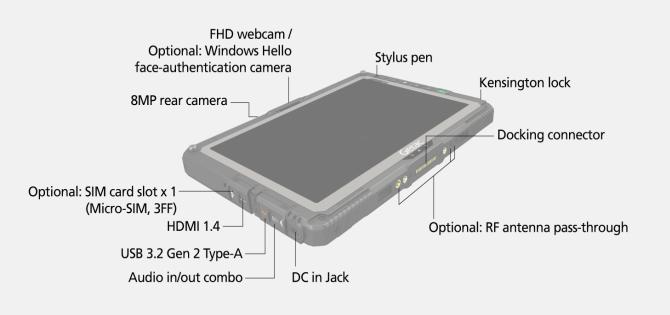



Generated date: 02 November 2022

GLACIER COMPUTER 603.882.1560. ext 6 sales@glaciercomputer.com https://glaciercomputer.com

**Rugged Mobile Computing Solutions** 

## **SPECIFICATIONS**

#### Generation G2-R

**Operating System** Windows 10 Pro Windows 11 Pro

Mobile Computing Platform Intel<sup>®</sup> Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel<sup>®</sup> Turbo Boost Technology - 6MB Intel<sup>®</sup> Smart Cache

Platform options: Intel<sup>®</sup> Core™ i5-10310U, vPro Processor 1.7GHz Max. 4.4GHz with Intel<sup>®</sup> Turbo Boost Technology - 6MB Intel<sup>®</sup> Smart Cache

Intel<sup>®</sup> Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel<sup>®</sup> Turbo Boost Technology 8MB Intel<sup>®</sup> Smart Cache

Intel<sup>®</sup> Core™ i7-10610U vPro Processor 1.8GHz Max. 4.9GHz with Intel<sup>®</sup> Turbo Boost Technology - 8MB Intel<sup>®</sup> Smart Cache

#### VGA Controller

Intel<sup>®</sup> UHD Graphics

Display 10.1" IPS TFT LCD WUXGA (1920 x 1200) Protection film 1,000 nits LumiBond<sup>®</sup> display with Getac sunlight readable technology Capacitive multi-touch screen

#### Storage & Memory

Storage & Merrory 8GB DDR4 Optional 16GB/32GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB PCIe NVMe SSD

#### Kevboard

ower button 5 tablet programmable buttons

#### **Pointing Device**

– Capacitive multi-touch screen – Capacitive multi-touch screen – Optional dual mode touchscreen (multi-touch and

## digitizer)

**Expansion Slots** Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port<sup>1</sup>, or HF RFID reader

Optional (right side): Fingerprint reader, or HF RFID reader

Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader

#### I/O Interface

Serial Port

External VGA

Microphone

Audio Output

DC in Jack

USB

LAN

HDMI 1.4

**RF** Antenna Connector

Kensinaton Lock

HD webcam x 1 ° 8M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 2 Type-A x 1 HDMI 1.4 x 1 Dediine camera tanu x 1 Docking connector x 1 Optional: SIM card slot x 1 (Micro-SIM, 3FF) Optional: Windows Hello face-authentication camera (front-facing) x 1 <sup>v</sup> Optional: RF antenna pass-through for GPS, WWAN and WLAN

#### **Communication Interface**

Intel<sup>®</sup> Wi-Fi 6 AX200, 802.11ax Optional: Dedicated GPS <sup>vii</sup> Optional: A GLTE mobile broadband with integrated GPS <sup>vii,vii</sup>

Vehicle Dock

USB 2.0 x 2 USB 3.2 Gen 1 x 2

3 (WWAN, WLAN, GPS)

1

\_

1

1

1

Optional: 10/100/1000 base-T Ethernet

#### Security Features

TPM 2.0 Kensington lock Optional: Intel<sup>®</sup> vPro™ Technology Optional: HF RFID reader <sup>™</sup> Optional: Fingerprint reader Optional: Smart card reader

#### Power

AC adapter (65W, 100-240VAC, 50/60 Hz) Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1 Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1 Optional: Bridge battery <sup>iv</sup>

## Dimension (W x D x H) & Weigh

276.8 x 194.5 x 23.5 mm (10.89□ x 7.65□ x 0.92□) 1.22kg (2.68lbs) <sup>ix</sup>

#### **Rugged Feature**

MIL-STD-810H certified IP65 certified MIL-STD-461G certified <sup>×</sup> Vibration & 6ft (1.8m) drop resistant <sup>31</sup> Optional: ANS/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) <sup>301</sup> Optional: Salt fog certified

#### **Environmental Specification**

Temperature <sup>eff</sup>: – Operating: -29°C to 63°C / -20°F to 145°F – Storage: -51°C to 71°C / -60°F to 160°F Humidity: – 95% RH , non-condensing

### Pre-installed software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager <sup>xiii</sup> Getac Driving Safety Utility (trial version) Getac KeyWedge Barcode Reader Utility (trial version) Optional: Absolute Persistence<sup>®</sup>

#### **Optional software**

Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility \*

#### Accessories

Accessories Battery (11.1V, typical 4200mAh; min. 4080mAh) AC adapter (65W, 100-240VAC) Capacitive stylus with tether

#### **Optional:**

Carry bag Folio case Folió case Battery (11.1V, typical 4200mAh; min. 4080mAh) High capacity Li-ion battery (10.8V, 9240 mAh) Multi-Bay charger (Dual-Bay) Multi-Bay charger (Eight-Bay) AC adapter (65W, 100-240VAC) Office dock AC adapter (90W, 100-240VAC) MIL-STD-461 AC adapter (90W, 100-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Diritizer nen Digitizer pen Capacitive stylus with tether Protection film Protection film Hand strap Shoulder strap (2-point) Shoulder harness (4-point; handsfree) Detachable keyboard Vehicle cradle \*\* Keyboard dock Vehicle dock <sup>xv</sup> Office dock 100W Type-C adapter Getac rugged keyboard

Office Dock

USB 2.0 x 2 USB 3.2 Gen 1 x 2

1

1

1

1

1

1

1

1

## UX10 FULLY **RUGGED TABLET**

Bumper-to-Bumper warranty Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hasle-free guarantee. That means you can depend on us to have your unit back in service within days.

#### Standard

3 years Bumper-to-Bumper

- 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options. 3.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). Fingerprint reader and HF RFID reader are mutually exclusive options. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options. П.
- Ш.
- IV.
- V.
- authentication camera (increasing) are increasing exclusive options. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in VI the area
- Supports GPS and Glonass VII VIII
- IX
- X. XI.
- Supports GPS and Glonass. Units with 4G LTE option come with an embedded SIM card slot. Weight and dimensions vary from configurations and optional accessories. MIL-STD-461 90W AC adapter sold separately. Drop test results vary from configurations and optional accessories. Tested by an independent third-party test lab following MIL-STD-810H. Available when barcode reader option is selected. Models require either embedded or standalone GPS module. XII.
- XIII. XIV. module. Gamber Johnson and Havis vehicle docks are e-mark
- XV certified Available with limited configurations and environment XVI.
- conditions. From 14th October 2025, Windows 10 Pro is going to XVII.
- End of Service. Windows 10 Pro will not be upgradable to Windows 11 Pro and will no longer be eligible to receive Microsoft security updates.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

