




V110 FULLY RUGGED LAPTOP

- 12th Generation Intel® Core™ i7 / i5 vPro® Processor
- 11.6" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with Intel® vPro®, Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- LifeSupport battery swappable technology



V110 3D Demo

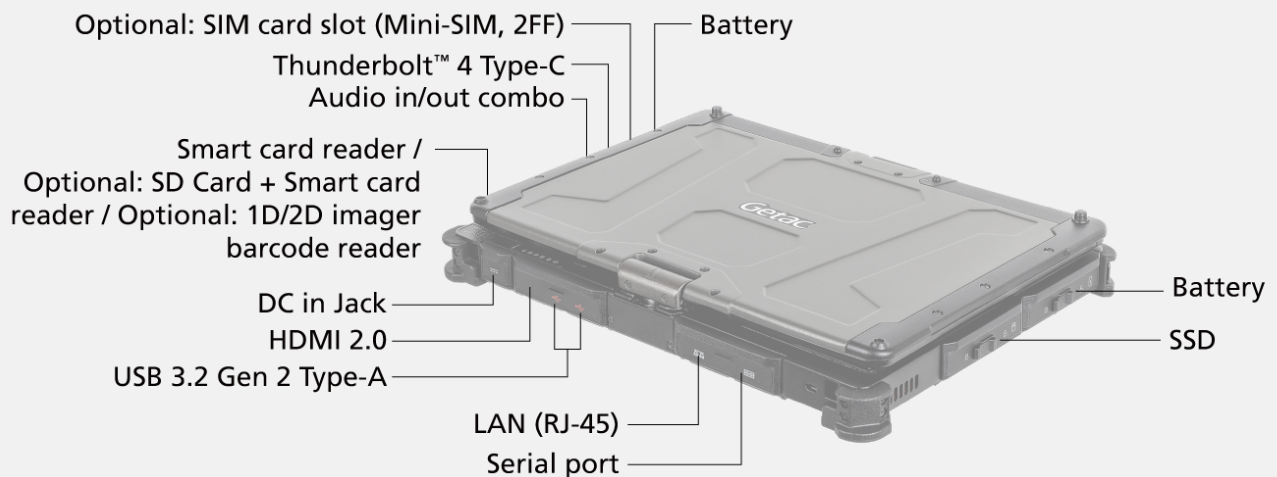

SPECIFICATIONS

Generation
G7

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ i5-1235U Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1245U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Graphics
Intel® Iris® X® Graphics ⁱ

Display
11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
8GB DDR4
Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard
LED backlit membrane keyboard
Optional: Rubber keyboard
Power button
5 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)
Touchpad
- Glide touchpad with left-click and right-click buttons

Audio
Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot
Smart card reader ⁱⁱ
Optional: SD Card + Smart card reader ⁱⁱ
Optional: 1D/2D imager barcode reader ⁱⁱ

I/O Interface
5MP webcam x 1 ⁱⁱⁱ
Audio in/out combo x 1
DC in Jack x 1
Thunderbolt™ 4 Type-C x 1
USB 3.2 Gen 2 Type-A x 2
LAN (RJ45) x 1
HDMI 2.0 x 1
Serial port (9-pin; D-sub) x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{iv}
Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1 ⁱⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN
Optional: 8MP auto focus rear camera x 1

Communication Interface
10/100/1000 base-T Ethernet
Intel® Wi-Fi 6E AX211, 802.11ax
Bluetooth (v5.3) ^v
Optional: Dedicated GPS ^{vii}
Optional: 4G LTE mobile broadband ^{vi, iv, xvi}
Optional: 5G Sub-6 ^{iv, vi, xvi}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM) ^{iv, vi}

Security Feature
TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Fingerprint reader
Optional: HF RFID reader ^{viii}
Smart card reader
Optional: Windows Hello face-authentication
FHD camera (front-facing) ⁱⁱ
Optional: Absolute Persistence®

Power
AC adapter (65W, 100-240VAC, 50/60Hz)
Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight
313 x 238 x 39mm (12.32" x 9.37" x 1.53")
2.1kg (4.63lbs) ^{viii}

Rugged Feature
MIL-STD-810H certified
IP65 certified
MIL-STD-461G certified ^{ix}
Vibration 8amp; 4ft (1.2m) drop resistant ^x
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{xi}
Optional: Salt fog certified

Environmental Specification
Temperature ^{xii}
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xiii}
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional software
Getac Driving Safety Utility
Getac Device Monitoring System (GDMS)
Getac Monitoring
Getac VGPS Utility ^{xiv}

Accessories
Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (65W, 100-240VAC)
Capacitive stylus with tether

Optional:
Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
X strap
Shoulder strap (2-point)
Vehicle cradle ^{xv}
Vehicle dock ^{xv}
Office dock
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard
Getac DS100 USB-C docking station with AC adapter

V110 FULLY RUGGED LAPTOP

Bumper-to-Bumper warranty
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard
3 years Bumper-to-Bumper

- I. Units equipped with dual channel memory come with Intel® Iris® X® Graphics.
- II. Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive.
- III. 5MP webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G option come with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Drop test results vary from configurations and optional accessories.
- XI. Available with limited configurations and environment conditions.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIII. Available when barcode reader option is selected.
- XIV. Models require either embedded or standalone GPS module.
- XV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVI. Support GLONASS, Galileo, and BeiDou. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	1	1
LAN	4	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--