




Agile X IS Accessories

Datasheet

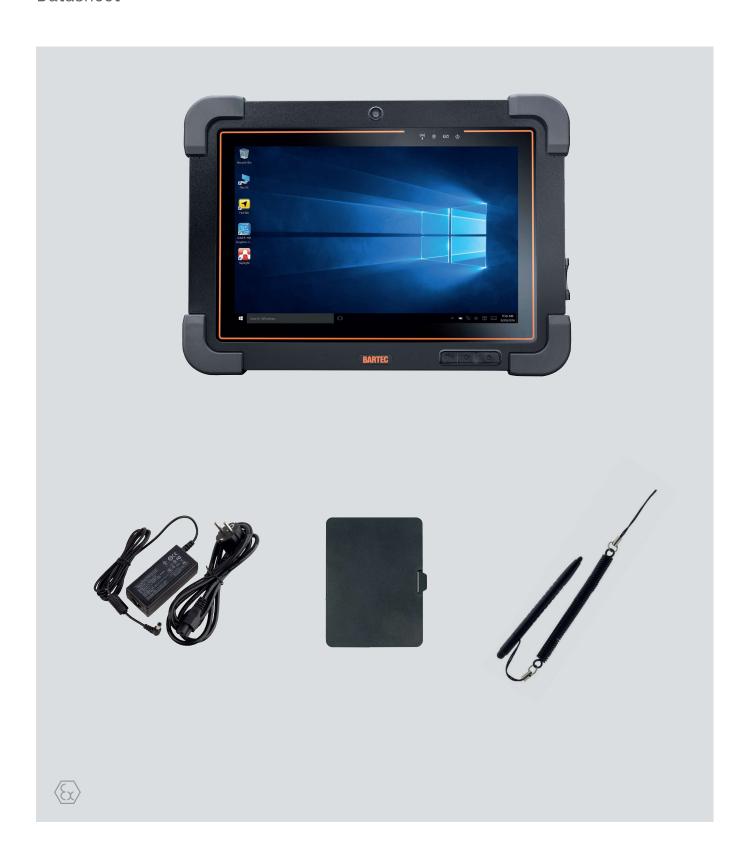

Accessories for use in potentially explosive atmospheres

Accessories are approved for:

- ATEX: Zone 0/1 (DEMKO 16 ATEX 1803)
- IECEx: Zone 0/1 (IECEx UL 16.0160)
- UL: Class I Div. 1 (File E226123)



External battery

Description	 Lithium-ion battery 7.4 V/4200 mAh (31.08 Wh) hot-swappable May only be charged outside the potentially explosive atmosphere!
Order no.	17-A1Z0-0006



Cover module

Description	 Cover module for battery compartment hot-swappable May only be changed outside the potentially explosive atmosphere!
Order no.	03-9849-0150



MicroSD card (MLC)

Description	 Suitable for Tablet PC Series Agile Storage capacity: 32 GB May only be changed outside the potentially explosive atmosphere!
Order no.	17-A1Z0-0010







USB stick

Description	 Certified in combination with Agile X IS Storage capacity: 8 GB Intrinsically safe May only be changed outside the potentially explosive atmosphere!
Order no.	17-A1Z0-0007



HART Add-on module

man	on modulo
Description	 Certified in combination with Agile X IS To configure, parametrise, read and measure HART devices in potentially explosive atmosheres Driver software makes it easy to install and set up Connection to HART loop as secondary master Hardware supports Version 5, 6 and 7 HART May only be assemble/disassemble outside the potentially explosive atmosphere!
Order no.	17-A1Z0-0005



Cover for expansion port

Cover for expansion port	
Description	 Suitable for Tablet PC series Agile 1 piece black May only be changed outside the potentially explosive atmosphere!
Order no.	03-9827-0011



Screen protector

Description	
Description	Certified in combination with Agile X IS1 piece
	May only be changed outside the potentially
	explosive atmosphere!
Order no.	17-A1Z0-0011



Dual stylus

Description	Suitable for capacitive touchscreen1 pieceWith spiral cord
Order no.	03-9849-0151



Carry system

Description	 Suitable with Agile X IS Simplified handling Ergonomic back trace with shoulder pad for safe carrying in front of the body Access to battery and integration of Add-on modules possible with holder for stylus adjustable strap length
Scope of delivery	Leather carry case4-point beltShoulder strap
Order no.	03-9829-0101



Leather carry case

Description	 Suitable with Agile X IS With practical stand function and holder for stylus Access to battery possible Upgradable with shoulder strap and 4-point belt Robust industry quality leather
Order no.	03-9829-0089



4-point belt	
Description	 Suitable for leather carry case of Tablet PC series Agile Ergonomic back trace with shoulder pad for safe carrying in front of the body Easy and secure fitting on leather carry case using coloured pop fasteners Adjustable strap length
Order no.	03-9829-0092







Shoulder strap

 Suitable for leather carry case of Tablet PC series Agile Ergonomic and soft shoulder pad Adjustable strap length
03-9829-0091



Battery bag

Description	 Suitable for external battery of Agile X IS Easy mounting on 4-point belt or belt 	
Order no.	03-9849-0155	

Accessories for use outside potentially explosive atmospheres



2-slot battery charging station		
Description	 Suitable with Agile X IS For charging 2 batteries Input voltage: DC 10 V to 20 V (50 W) Charge indicator by LED and buzzer Two charging stations can be charged with one power supply 	
Scope of delivery	2-slot battery charging stationPower supplyAC power cable (EU + US)	

03-9914-0021

Order no.



Docking station Description Suitable for Agile Tablet PC Series Input voltage: DC 19 V Charging with inserted battery 4 x USB 2.0 Interfaces - 1 x RS232 - 1 x Ethernet 10/100 Mbit/s 1 x HDMI 1 x Charging port Scope of delivery Docking Station - Mounting bracket - Screws for mounting bracket (6 pieces) - Fixation elements (2 pieces) - Inserts for Agile X (2 pieces) - Screws for insert (2 pieces) - Rubber pads (4 pieces) - Power supply - Power cable (EU + US) Quick start guide (EN) Order no. 03-9914-0022





Power supply

Description	 suitable for Agile Tablet PC Series Input voltage: AC 100 V to 240 V Output voltage: DC 19 V/3.42 A 	
Order no.	03-9911-0040	



AC power cable

Description	3-wirecountry-specific		
Order no.	Version: EU	03-9609-0023	
	Version: US	03-9609-0022	
	Version: UK	03-9609-0024	
	· ·	Please purchase the required countryspecific sables in the respective country!	

