## Getac







# X600 FULLY RUGGED LAPTOP

- 11th Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 vPro<sup>®</sup> Processor
- 15.6" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and optional capacitive touchscreen
- Enhanced enterprise security features with TPM 2.0, Kensington lock, triple user-replaceable storage and Smart card reader
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- Dual batteries with the hot-swappable capability
- Optional discrete graphic NVIDIA® Quadro® RTX3000
















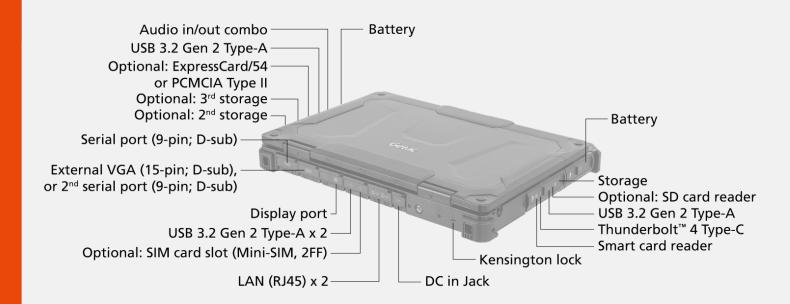

#### **SPECIFICATIONS**

#### Generation

#### **Operating System** Windows 11 Pro

#### **Mobile Computing Platform**

Intel® Core™ i5-11500HE vPro® Processor Max. 4.5GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Platform options: Intel® Core™ I7-11850HE vPro® Processor Max. 4.76Hz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache

Intel® Xeon® W-11865MRE vPro® Processor Max. 4.7GHz with Intel® Turbo Boost Technology - 24MB Intel® Smart Cache

#### Graphics

Intel® UHD Graphics
Optional: NVIDIA® Quadro® RTX3000
6GB discrete graphics controller [1,1]
Optional: NVIDIA® GeForce® GTX1650
4GB discrete graphics controller [1,1]

#### Display

Projection film 1,000 nits LumiBond display with Getac sunlight readable technology Optional: Capacitive multi-touch screen

#### Storage & Memory

16GB DDR4 Optional: 32GB / 64GB / 128GB DDR4

512GB PCIe SSD Optional: 1TB / 2TB PCIe SSD Optional 2<sup>nd</sup> storage: 512GB / 1TB / 2TB PCIe SSD Optional 3<sup>rd</sup> storage: 512GB / 1TB / 2TB PCIe SSD

Keyboard LED backlit membrane keyboard with integrated numeric keypad

**Pointing Device** 

Touchscreen - Optional: Capacitive multi-touch screen

Touchpad - Touchpad with two buttons

#### **Expansion Slot**

Smart card reader Optional: ExpressCard 54 or PCMCIA Type II iv Optional: SD card reader

#### I/O Interface

SMP webcam x 1 Thunderbolt™ 4 Type-C x 1 xiii USB 3.2 Gen 2 Type-A x 4 LAN (RJ-45) x 2 Audio in/out combo x 1 DC in Jack x 1 HDMI 2.0 x 1 Display port x 1 HDMI 2.0 x 1
Display port x 1
Docking connector x 1
Serial port (9-pin; D-sub) x 1
External VGA (15-pin; D-sub) x 1 or 2<sup>nd</sup>
serial port (9-pin; D-sub) x 1 or 2<sup>nd</sup>
optional: SIM card slot x 1 (Mini-SIM, 2FF) optional: RF antenna pass-through for GPS,
WWAN and WLAN

#### Communication Interface

2.5GBASE-T Ethernet Intel® Wi-Fi 6E AX210, 802.11ax Bluetooth (v5.2) <sup>wil</sup> Optional: Dedicated GPS <sup>wili, ix</sup> Optional: 4G LTE mobile broadband with integrated GPS <sup>vi, viii</sup>

## Security Feature

TPM 2.0 TPM 2.0 Kensington lock Smart card reader Intel ® vPro ® Technology Getac Disk Wipe Optional: Absolute Persistence®

AC adapter (150W, 100-240VAC, 50/60Hz) <sup>ii</sup> AC adapter (230W, 100-240VAC, 50/60Hz) <sup>ii</sup> Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2

#### Dimension (W x D x H) & Weight

412 x 322 x 52.5mm (16.22" x 12.68" x 2.07") <sup>x</sup> 4.41kg (9.72lbs) <sup>x</sup>

## Rugged Feature

MIL-STD-810H certified MIL-S1D-81UH cerumeu
IP66 certified
MIL-STD-461G certified \*<sup>i</sup>
Vibration and 4ft (1.2m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)
Optional: Salt fog certified

### Environmental Specification

- Temperature \*\*\* : Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F Humidity: 95% RH, non-condensing

#### Pre-installed Software

Getac Utility
Getac Geolocation
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

#### Optional software

Getac Device Monitoring System (GDMS) Getac VGPS Utility

Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh) x 2 AC adapter (150W, 100-240VAC, 50/60Hz)  $^{\rm ii}$  or AC adapter (230W, 100-240VAC, 50/60Hz)  $^{\rm i}$  Capacitive stylus with tether

#### Optional:

Optional:
Backpack
Backpack
Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
AC adapter (150W, 100-240VAC, 50/60Hz) ii
AC adapter (230W, 100-240VAC, 50/60Hz) ii
AC adapter (230W, 100-240VAC, 50/60Hz) ii
Office dock AC adapter (230W, 100-240VAC, 50/60Hz) ii
MIL-STD-461 AC adapter (230W, 100-240VAC) ii
DC-DC vehicle adapter (230W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle dock
Office dock
Spare SSD kit

### Bumper-to-Bumper warranty

Bumper-to-Bumper warranty
Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime. That is why Getac has
introduced accidental damage as standard
under our Bumper-to-Bumper warranty, to help
minimize your enterprise IT costs. Bumper-toBumper
is your hassle-free guarantee. That
means you can depend on us to have your unit
back in service within days.

**Standard** 3 years Bumper-to-Bumper

## The configuration with a discrete graphic controller requires the 230W AC adapter. TSOW AC adapter, so not applicable with discrete graphic controller nor office dock. For X600 optional NVIDIA® Quadro® RTX3000, the operating temperature is 0°C to 63°C / 32°F to 145°F. ExpressCard 54 and PCMCIA Type II card readers are mutually exclusive. The 2<sup>nd</sup> serial port is optional and mutually exclusive with External VGA. Units with 4G LTE option comes with an embedded SIM card slot. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. Dedicated GPS and 4G LTE are mutually exclusive options. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Weight and dimensions vary from configurations and optional accessories. MIL-STD-461 230W AC adapter sold separately. Tested by an independent third-party test lab following MIL-STD-810H.

X600 FULLY

**RUGGED LAPTOP** 

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

XIII. Does not support USB power delivery

