


B360 Pro FULLY RUGGED LAPTOP



- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- Optional NVIDIA® Quadro® RTX A500 4GB discrete graphic controller
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology



B360 Pro 3D demo

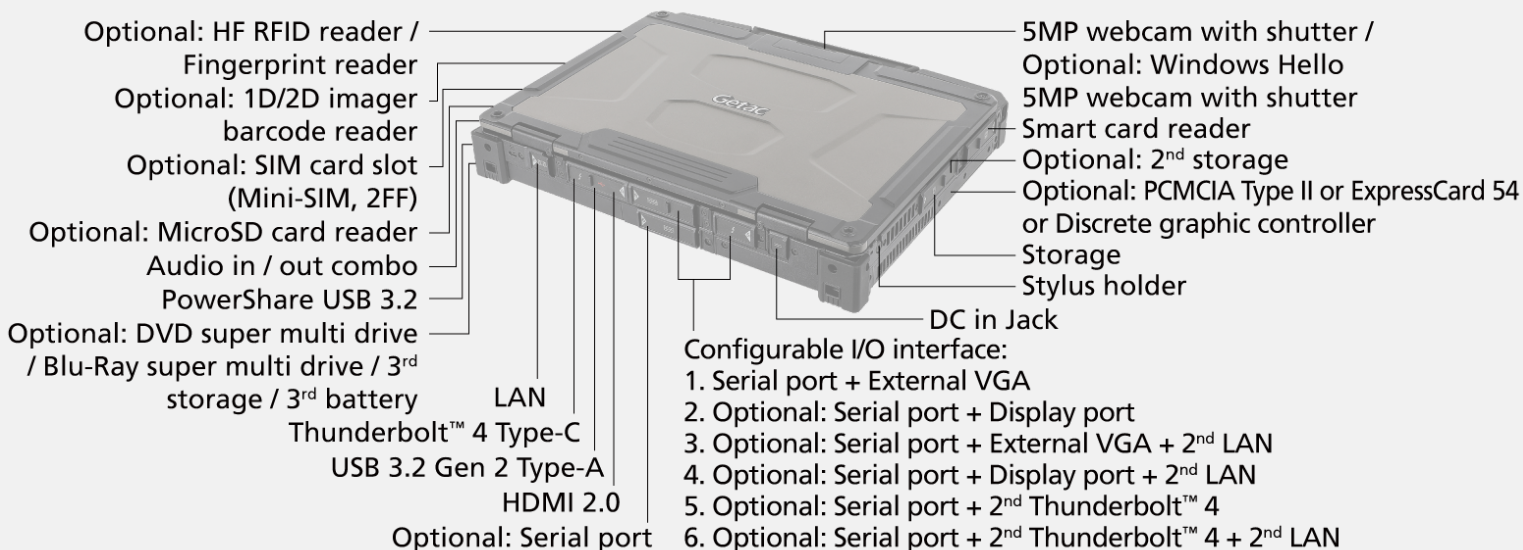

SPECIFICATIONS

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H
Max. 4.9GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise
Max. 5.0GHz with Intel® Turbo Boost Technology
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H
Max. 5.1GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise
Max. 5.3GHz with Intel® Turbo Boost Technology
- 24MB Intel® Smart Cache

Graphics

Intel® Arc™ Graphics 1
Optional: NVIDIA® Quadro®
RTX A500 4GB discrete graphic controller ^{ix, xii}

NPU

Intel® AI Boost

Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR5
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2nd storage ^{ix}:
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD
Optional multimedia bay storage : 1TB / 2TB SATA SSD

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Touchpad
- Touchpad with two buttons

Audio

Integrated stereo speakers
Integrated dual-array microphone

Expansion Slot

Smart card reader x 1
Optional: Micro SD card reader x 1
Optional: Discrete graphics controller, or PCMCIA Type II,
or ExpressCard 54 ^{ix}
Optional: 1D/2D imager barcode reader

Multimedia Bay

Configurable options ^{v, vi} :
1. Optional: DVD super multi drive, or Blu-Ray super multi drive,
or 3rd storage
2. Optional: 3rd battery

I/O Interface

5MP webcam x 1 ^{vi}
Audio in/out combo x 1
DC In Jack x 1
PowerShare USB 3.2 x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1 ^{viii}
LAN (RJ45) x 1
HDMI 2.0 x 1
Docking connector x 1
Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{ix}
Optional: Windows Hello face-authentication
5MP camera (front-facing) x 1 ^{vi}
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options ^{ix}:

1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1 + Display port x 1
3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2nd LAN (RJ45) x 1
5. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1
6. Serial port (9-pin; D-sub) x 1 + 2nd Thunderbolt™ 4 Type-C x 1 + 2nd LAN (RJ45) x 1
7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
8. Serial port (9-pin; D-sub) x 2 + Display port x 1
9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2nd LAN (RJ45) x 1
10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2nd LAN (RJ45) x 1
11. Serial port (9-pin; D-sub) x 2 + 2nd Thunderbolt™ 4 Type-C x 1
12. Serial port (9-pin; D-sub) x 2 + 2nd Thunderbolt™ 4 Type-C x 1 + 2nd LAN (RJ45) x 1

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE200, 802.11be
Bluetooth (v5.4) ^{ix}
Optional: Dedicated GPS with L1/L5 ^{xiii}
Optional: 4G LTE mobile broadband with integrated GPS ^{xiv, xvii}
Optional: 5G Sub-6 with integrated GPS ^{xix, xxv, xxvi}
Optional: Dual SIM (Mini-SIM 2FF and e-SIM) ^{ix, xvii}

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Getac Disk Wipe
Optional: Fingerprint reader ^{xv}
Optional: HF RFID reader ^{xvi, xvii}
Optional: Absolute Persistence®

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
AC adapter (120W, 100-240VAC, 50/60Hz) ⁱⁱ
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")
3.08kg (6.79lbs) ^{xxii}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{xxiii}
Vibration & Gft (1.8m) drop resistant
Optional: ANS/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^{xix}
Optional: Salt fog certified

Environmental Specification

Temperature ^{ix}
- Operating: -29°C to 63°C / -20°F to 145°F ^{xii}
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager ^{xxii}
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional Software

Getac Driving Safety Utility
Getac VGPS Utility ^{xxiii}

Accessories

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
AC adapter (120W, 100-240VAC) ⁱⁱ
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Capacitive stylus with tether
Protection film
Vehicle cradle ^{xxiv}
Vehicle dock ^{xxv}
Vehicle dock ^{xxvi}
Office dock
Spare SSD kit
100W Type-C adapter ^{xxvii}

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and ExpressCard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2nd Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices; users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FelICa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPS module.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC In Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



GLACIER
COMPUTER
A Logic Instrument Company

sales@glaciercomputer.com
866.724.6257 Ext 6
Visit us at - <https://glaciercomputer.com>