


ZX10 FULLY RUGGED TABLET



- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended ¹



ZX10 3D demo

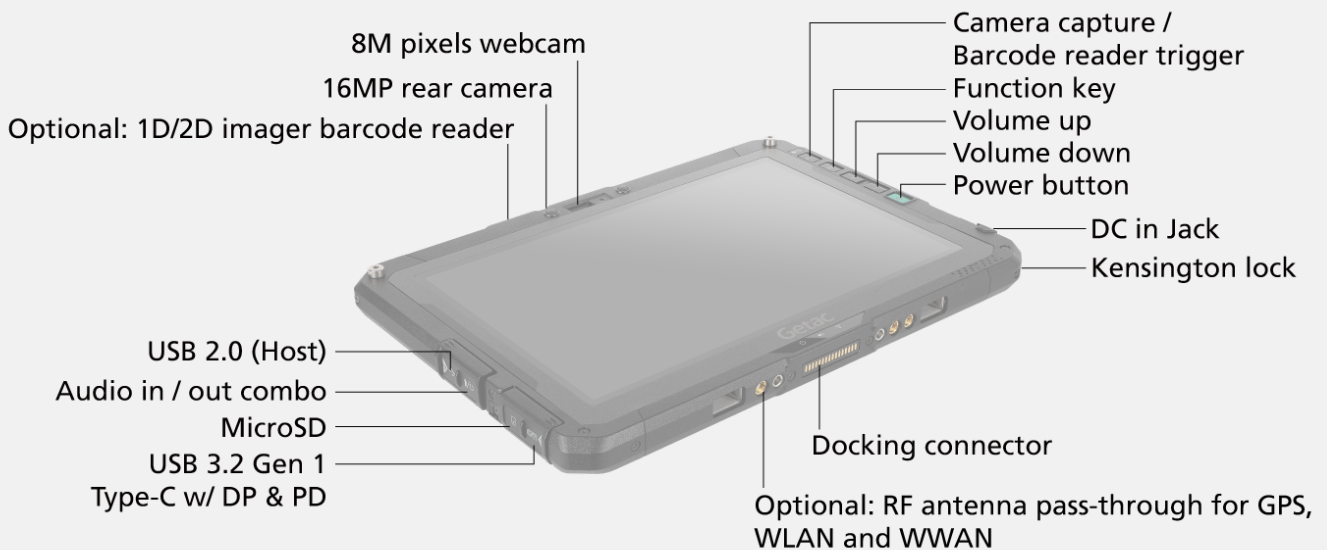

SPECIFICATIONS

Generation

G1

Operating System

Android™ 13

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)

Protection film

800 nits LumiBond display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4, 64GB eMMC

Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button

4 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: Smart card reader

Optional: HF RFID/NFC combo reader ⁱⁱ

I/O Interface

8M pixels webcam x 1

16M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 1 Type-C w/ DP & PD x 1

USB 2.0 (Host) x 1

MicroSD x 1

Docking connector x 1

Optional: SIM card slot x 2 (Micro-SIM, 3FF) ^{iv}

Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 802.11ac

Bluetooth (v5.0) ⁱⁱⁱ

Dedicated GPS

Optional: 4G LTE mobile broadband ^{iv}

Dual Micro SIM ^{iv}

Security Feature

Kensington lock

Optional: Smart card reader

Optional: HF RFID/NFC combo reader ⁱⁱ

Power

AC adapter (65W, 100-240VAC, 50/60Hz)

Li-ion battery(3.84V,typical 4990mAh;

min. 4870mAh)x 2

LifeSupport battery swappable technology

Optional: High capacity Li-ion battery

(3.84V, typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")

1.04kg (2.29lbs) ^v

Rugged Feature

MIL-STD-810H certified

IP66 certified

Vibration & 6 feet (1.8m) drop resistant

Optional: ANSI/UL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)

Optional: Salt fog certified

Environmental Specification

Temperature ^{vi}:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications

(Search, Chrome, Gmail, Maps, YouTube, Play,

Drive, YouTube music, Google TV, Duo and photos)

Getac Diagnostic Tool

Getac Monitoring (trial version) agent/SDK

Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac Management

Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)

AC adapter (65W, 100-240VAC, 50/60Hz)

Capacitive stylus with tether

Optional:

Carry bag

Battery (3.84V, typical 4990mAh; min. 4870mAh)

High capacity Li-ion battery (3.84V, typical 9980mAh;

min. 9470mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC, 50/60Hz)

Office dock AC adapter (65W, 100-240VAC)

DC-DC vehicle adapter (120W, 22-32VDC)

Digitizer pen with tether

Capacitive stylus with tether

Protection film

Hard handle

Hand strap

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Keyboard dock

Vehicle dock ^{vii}

Office dock

100W Type-C adapter

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days. Standard 3 years

Standard

3 years Bumper-to-Bumper

ZX10 FULLY RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. Units with 4G LTE option come with two embedded SIM card slots.
- V. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- VI. Tested by an independent third-party test lab following MIL-STD-810H.
- VII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available sp

	Office Dock (Pogo)	Vehicle Dock(Havis, Gamber-Johnson)	Vehicle Dock(RAM Mounts)
Serial Port	-	-	-
Microphone	1	1	-
Audio Output	1	1	-
DC in Jack	1	1	1
USB	USB 2.0 x 3	USB 2.0 x 2	USB 2.0 x 1 or USB 2.0 x 2
LAN	1	-	-
HDMI	1	-	-
RF Pass-through	-	3 (WWAN, WLAN, GPS)	-
Kensington Lock	-	-	-